

Read before installation.


Before installing the Yakk exp Skid plate remove the original engine cover.

All bolts have to be finally tighten after installation all parts on vehicle.

Skid plate black

Stark Varg MX EX

ID:3094682

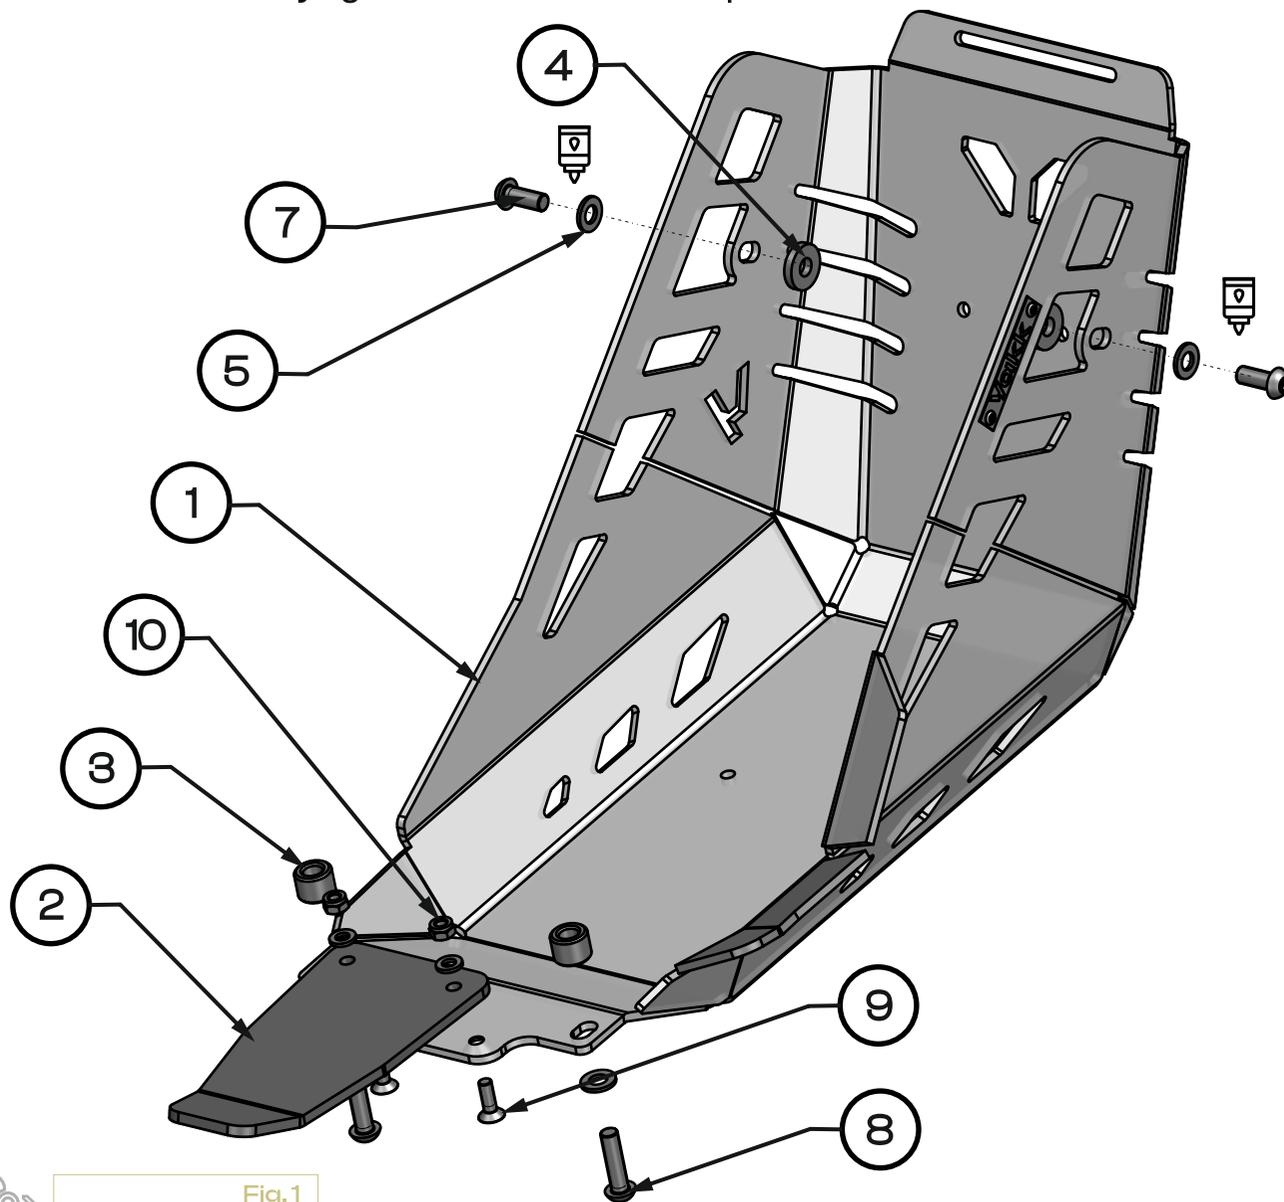

- 1** Engine guard 1x
- 2** Cover 1x
- 3** Spacer sleeve 2 x

d9xD17xH13
- 4** Washer 2x

M8-DIN 7349
- 5** Washer 4x

M8-DIN 125
- 6** Washer 2x

M6-DIN 125
- 7** Bolt 2x

M8x20-DIN 7380
- 8** Bolt 2x

M8x30-DIN 7380
- 9** Bolt 2x

M6x18-DIN 7991
- 10** Nut 2x

M6-DIN 985

	Steel 8.8	Steel 10.9	Steel 12.9
M4	2,7	4	4,9
M5	5,5	8	9,8
M6	9,7	13,7	16
M8	23	33	40
M10	47	66	83
M12	80	116	150
M14	130	184	240
M16	196	287	350
M18	270	395	490
M20	385	560	690



Fig.1



one person



use a medium-strength



tighten with torque

OEM

Original Equipment Manufacturer

Yoikk EXP


[assembly instructions](#)

yakkexp.com




EXPLORE POSSIBILITIES

1. Unscrew the side and bottom bolts securing the original guard **OEM** using appropriate tools, then remove the guard. **[Fig.2].**

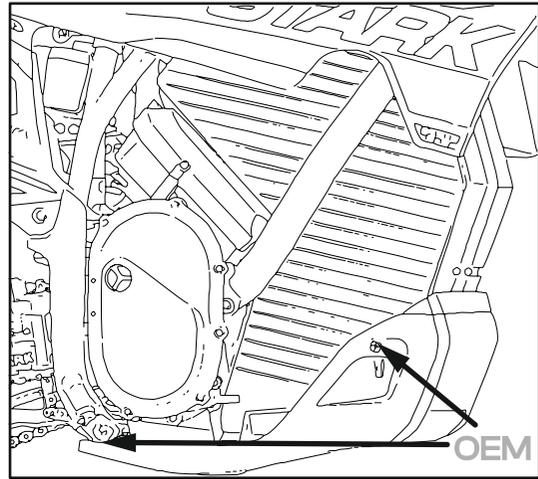


 **Fig.2**

3. Position the **[1]** Engine guard and fasten it through **[3]** Spacer sleeve, using **[5]** Washer M8 DIN 125, **[8]** Bolt M8x30 and apply a medium-strength threadlocker. **[Fig.1],[Fig.4].**

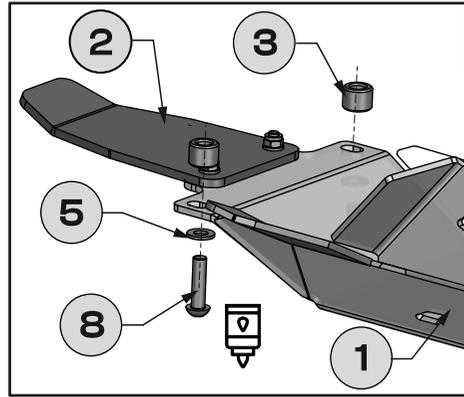


 **Fig.4**

2. Fasten **[2]** Cover to **[1]** Engine guard using **[9]** Bolt M6x18 From the bottom side, secure it with **[6]** Nut M8 through **[5]** Washer M8 DIN 125. **[Fig.3]**

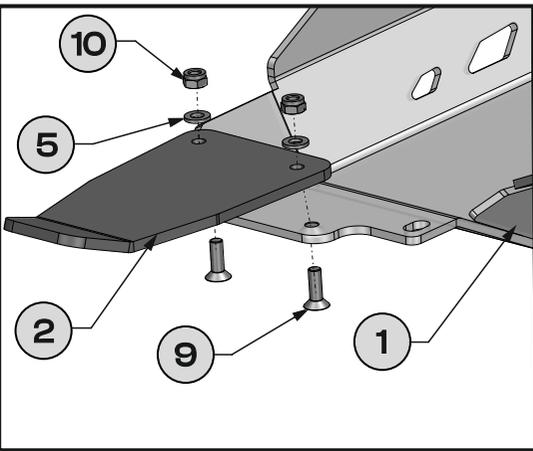


 **Fig.3**

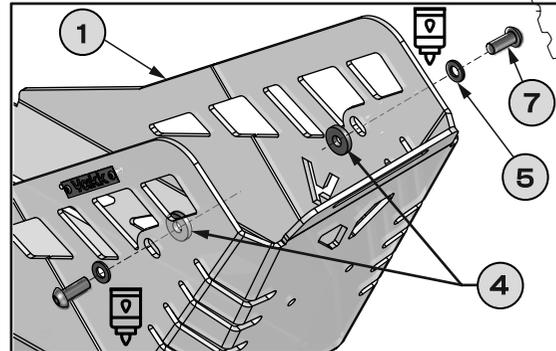

 **Fig.5**

4. Position **[1]** Engine guard relative to the mounting holes of the motorcycle. Place **[5]** Washer M8 DIN 125 onto **[7]** Bolt M8x20, then pass the bolt through **[1]** Engine guard and further through **[4]** Washer M8 DIN 7349 as shown in the drawing. Apply a medium-strength threadlocker and screw **[7]** Bolt M8x20 into the mounting hole. After aligning **[1]** Engine guard, tighten all bolts to the appropriate tightening force. **[Fig.1],[Fig.5]**

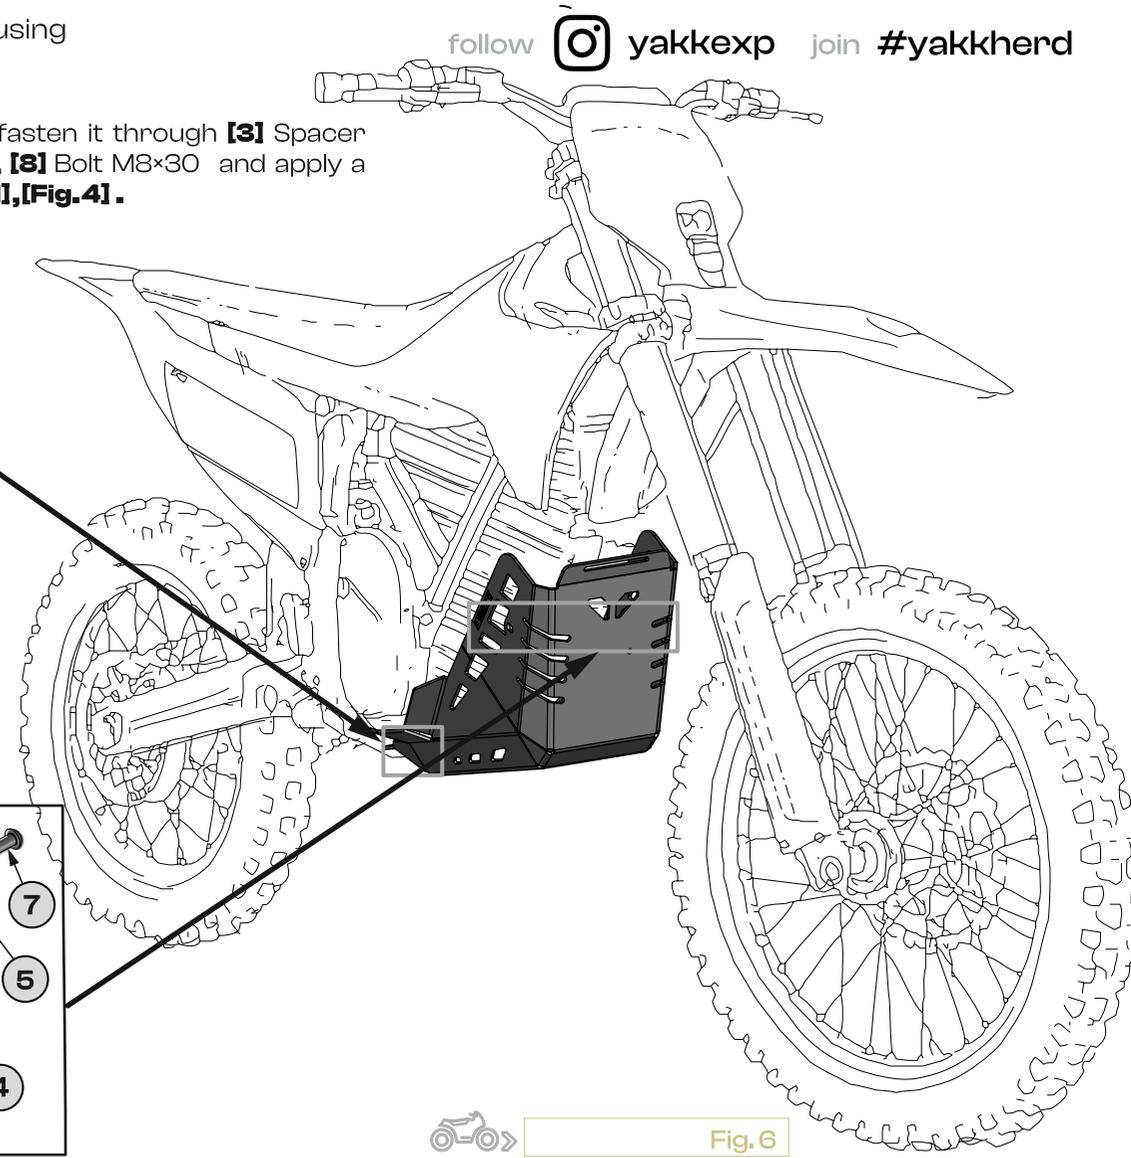

 **Fig.6**

 one person  use a medium-strength  tighten with torque **OEM** Original Equipment Manufacturer

